



# Product Cut Sheet

## CCS COMBINATION CABLING SECTION

The CCS Combination Cabling Section offers the best of CPI's cabling sections, but with added design features. This cabling section is double-sided with the front side featuring plastic cable guides (like those used on the MCS Master Cabling Section,) while the back retains the classic VCS Vertical Cabling Section design.

- 1U cable guides on the front designed for fanning and managing patch cords
- Open cabling section on the rear provides easy access and routes cable bundles feeding into the back of patch panels
- Edge-protected pass through ports make it easy to route cable from front to back; vertical slots along the center separator secure cable bundles neatly with optional Saf-T-Grip® Cable Management Straps
- Plastic Cable Guides meet UL 94V-0 Flame Resistant standards
- Innovative SwitchGate Door/Cover (front) is easily opened from the right or left and can be removed so that cable does not have to thread through guides
- Attach to Standard Racks, Universal Racks, QuadraRack or Adjustable QuadraRack frames
- Mounting hardware and doors are included

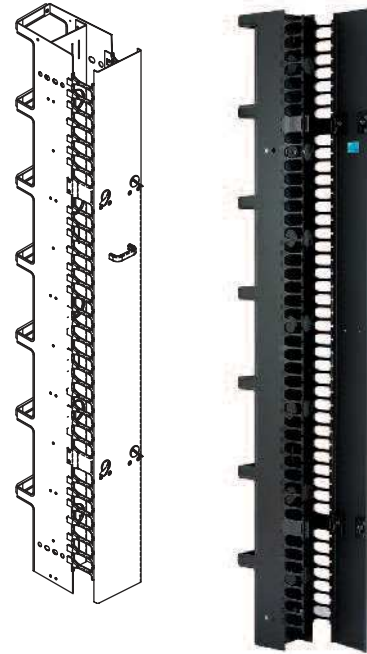

Usable Depth  
 For 3"D (80 mm) Rack Version:  
 Front=5.90" (149.9 mm); Rear=5.35" (135.9 mm)  
 For 6"D (150 mm) Rack Version:  
 Front=7.40" (188.0 mm); Rear=6.85" (174.0 mm)

| Part Number<br>3"D (80 mm) Racks | Height<br>ft (m) | Depth<br>in (mm) | Shipping Weight<br>lb (kg) |
|----------------------------------|------------------|------------------|----------------------------|
| <b>3.65"W (92.7 mm)</b>          |                  |                  |                            |
| 30161-X01                        | 6 (1.8)          | 12.24 (311)      | 25 (11.3)                  |
| 30161-X03                        | 7 (2.1)          | 12.24 (311)      | 29 (13.2)                  |
| 30161-X05                        | 7.6 (2.3)        | 12.24 (311)      | 31 (14.1)                  |
| 30161-X15                        | 8 (2.4)          | 12.24 (311)      | 33 (15.0)                  |
| 30161-X08                        | 9 (2.7)          | 12.24 (311)      | 38 (17.2)                  |
| <b>6"W (150 mm)</b>              |                  |                  |                            |
| 30162-X01                        | 6 (1.8)          | 12.24 (311)      | 29 (13.2)                  |
| 30162-X03                        | 7 (2.1)          | 12.24 (311)      | 34 (15.4)                  |
| 30162-X05                        | 7.6 (2.3)        | 12.24 (311)      | 37 (16.8)                  |
| 30162-X15                        | 8 (2.4)          | 12.24 (311)      | 39 (17.7)                  |
| 30162-X08                        | 9 (2.7)          | 12.24 (311)      | 44 (20.0)                  |
| <b>10"W (250 mm)</b>             |                  |                  |                            |
| 30163-X01                        | 6 (1.8)          | 12.24 (311)      | 40 (18.1)                  |
| 30163-X03                        | 7 (2.1)          | 12.24 (311)      | 46 (20.9)                  |
| 30163-X05                        | 7.6 (2.3)        | 12.24 (311)      | 50 (22.7)                  |
| 30163-X15                        | 8 (2.4)          | 12.24 (311)      | 53 (24.0)                  |
| 30163-X08                        | 9 (2.7)          | 12.24 (311)      | 59 (26.8)                  |

| Part Number<br>6"D (150 mm) Racks | Height<br>ft (m) | Depth<br>in (mm) | Shipping Weight<br>lb (kg) |
|-----------------------------------|------------------|------------------|----------------------------|
| <b>3.65"W (92.7 mm)</b>           |                  |                  |                            |
| 30164-X01                         | 6 (1.8)          | 14.61 (371)      | 28 (12.7)                  |
| 30164-X03                         | 7 (2.1)          | 14.61 (371)      | 33 (15.0)                  |
| 30164-X05                         | 7.6 (2.3)        | 14.61 (371)      | 36 (16.3)                  |
| 30164-X15                         | 8 (2.4)          | 14.61 (371)      | 38 (17.2)                  |
| 30164-X08                         | 9 (2.7)          | 14.61 (371)      | 43 (19.5)                  |
| <b>6"W (150 mm)</b>               |                  |                  |                            |
| 30165-X01                         | 6 (1.8)          | 14.61 (371)      | 33 (15.0)                  |
| 30165-X03                         | 7 (2.1)          | 14.61 (371)      | 38 (17.2)                  |
| 30165-X05                         | 7.6 (2.3)        | 14.61 (371)      | 41 (18.6)                  |
| 30165-X15                         | 8 (2.4)          | 14.61 (371)      | 44 (20.0)                  |
| 30165-X08                         | 9 (2.7)          | 14.61 (371)      | 49 (22.2)                  |
| <b>10"W (250 mm)</b>              |                  |                  |                            |
| 30166-X01                         | 6 (1.8)          | 14.61 (371)      | 42 (19.1)                  |
| 30166-X03                         | 7 (2.1)          | 14.61 (371)      | 49 (22.2)                  |
| 30166-X05                         | 7.6 (2.3)        | 14.61 (371)      | 53 (24.0)                  |
| 30166-X15                         | 8 (2.4)          | 14.61 (371)      | 56 (25.4)                  |
| 30166-X08                         | 9 (2.7)          | 14.61 (371)      | 63 (28.6)                  |

X=color; 7=Black, E=Glacier White.

800-834-4969 in US & Canada • [www.chatsworth.com](http://www.chatsworth.com)