



Product Cut Sheet

CCS COMBINATION CABLING SECTION

The CCS Combination Cabling Section offers the best of CPI's cabling sections, but with added design features. This cabling section is double-sided with the front side featuring plastic cable guides (like those used on the MCS Master Cabling Section,) while the back retains the classic VCS Vertical Cabling Section design.

- 1U cable guides on the front designed for fanning and managing patch cords
- Open cabling section on the rear provides easy access and routes cable bundles feeding into the back of patch panels
- Edge-protected pass through ports make it easy to route cable from front to back; vertical slots along the center separator secure cable bundles neatly with optional Saf-T-Grip® Cable Management Straps
- Plastic Cable Guides meet UL 94V-0 Flame Resistant standards
- Innovative SwitchGate Door/Cover (front) is easily opened from the right or left and can be removed so that cable does not have to thread through guides
- Attach to Standard Racks, Universal Racks, QuadraRack or Adjustable QuadraRack frames
- Mounting hardware and doors are included

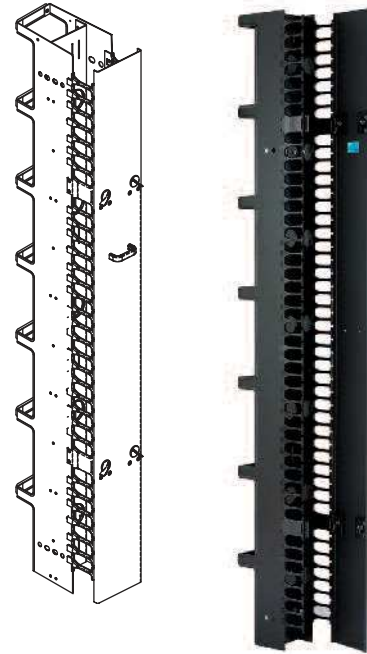

Usable Depth
 For 3"D (80 mm) Rack Version:
 Front=5.90" (149.9 mm); Rear=5.35" (135.9 mm)
 For 6"D (150 mm) Rack Version:
 Front=7.40" (188.0 mm); Rear=6.85" (174.0 mm)

| Part Number 3"D (80 mm) Racks | Height ft (m) | Depth in (mm) | Shipping Weight lb (kg) |
|----------------------------------|------------------|------------------|----------------------------|
| 3.65"W (92.7 mm) | | | |
| 30161-X01 | 6 (1.8) | 12.24 (311) | 25 (11.3) |
| 30161-X03 | 7 (2.1) | 12.24 (311) | 29 (13.2) |
| 30161-X05 | 7.6 (2.3) | 12.24 (311) | 31 (14.1) |
| 30161-X15 | 8 (2.4) | 12.24 (311) | 33 (15.0) |
| 30161-X08 | 9 (2.7) | 12.24 (311) | 38 (17.2) |
| 6"W (150 mm) | | | |
| 30162-X01 | 6 (1.8) | 12.24 (311) | 29 (13.2) |
| 30162-X03 | 7 (2.1) | 12.24 (311) | 34 (15.4) |
| 30162-X05 | 7.6 (2.3) | 12.24 (311) | 37 (16.8) |
| 30162-X15 | 8 (2.4) | 12.24 (311) | 39 (17.7) |
| 30162-X08 | 9 (2.7) | 12.24 (311) | 44 (20.0) |
| 10"W (250 mm) | | | |
| 30163-X01 | 6 (1.8) | 12.24 (311) | 40 (18.1) |
| 30163-X03 | 7 (2.1) | 12.24 (311) | 46 (20.9) |
| 30163-X05 | 7.6 (2.3) | 12.24 (311) | 50 (22.7) |
| 30163-X15 | 8 (2.4) | 12.24 (311) | 53 (24.0) |
| 30163-X08 | 9 (2.7) | 12.24 (311) | 59 (26.8) |

| Part Number 6"D (150 mm) Racks | Height ft (m) | Depth in (mm) | Shipping Weight lb (kg) |
|-----------------------------------|------------------|------------------|----------------------------|
| 3.65"W (92.7 mm) | | | |
| 30164-X01 | 6 (1.8) | 14.61 (371) | 28 (12.7) |
| 30164-X03 | 7 (2.1) | 14.61 (371) | 33 (15.0) |
| 30164-X05 | 7.6 (2.3) | 14.61 (371) | 36 (16.3) |
| 30164-X15 | 8 (2.4) | 14.61 (371) | 38 (17.2) |
| 30164-X08 | 9 (2.7) | 14.61 (371) | 43 (19.5) |
| 6"W (150 mm) | | | |
| 30165-X01 | 6 (1.8) | 14.61 (371) | 33 (15.0) |
| 30165-X03 | 7 (2.1) | 14.61 (371) | 38 (17.2) |
| 30165-X05 | 7.6 (2.3) | 14.61 (371) | 41 (18.6) |
| 30165-X15 | 8 (2.4) | 14.61 (371) | 44 (20.0) |
| 30165-X08 | 9 (2.7) | 14.61 (371) | 49 (22.2) |
| 10"W (250 mm) | | | |
| 30166-X01 | 6 (1.8) | 14.61 (371) | 42 (19.1) |
| 30166-X03 | 7 (2.1) | 14.61 (371) | 49 (22.2) |
| 30166-X05 | 7.6 (2.3) | 14.61 (371) | 53 (24.0) |
| 30166-X15 | 8 (2.4) | 14.61 (371) | 56 (25.4) |
| 30166-X08 | 9 (2.7) | 14.61 (371) | 63 (28.6) |

X=Color; 7=Black, E=Glacier White.

800-834-4969 in US & Canada • www.chatsworth.com