


Contact hazard protection cover

for TS enclosures with NH slimline fuse-switch disconnectors Productivity brochure, page 76

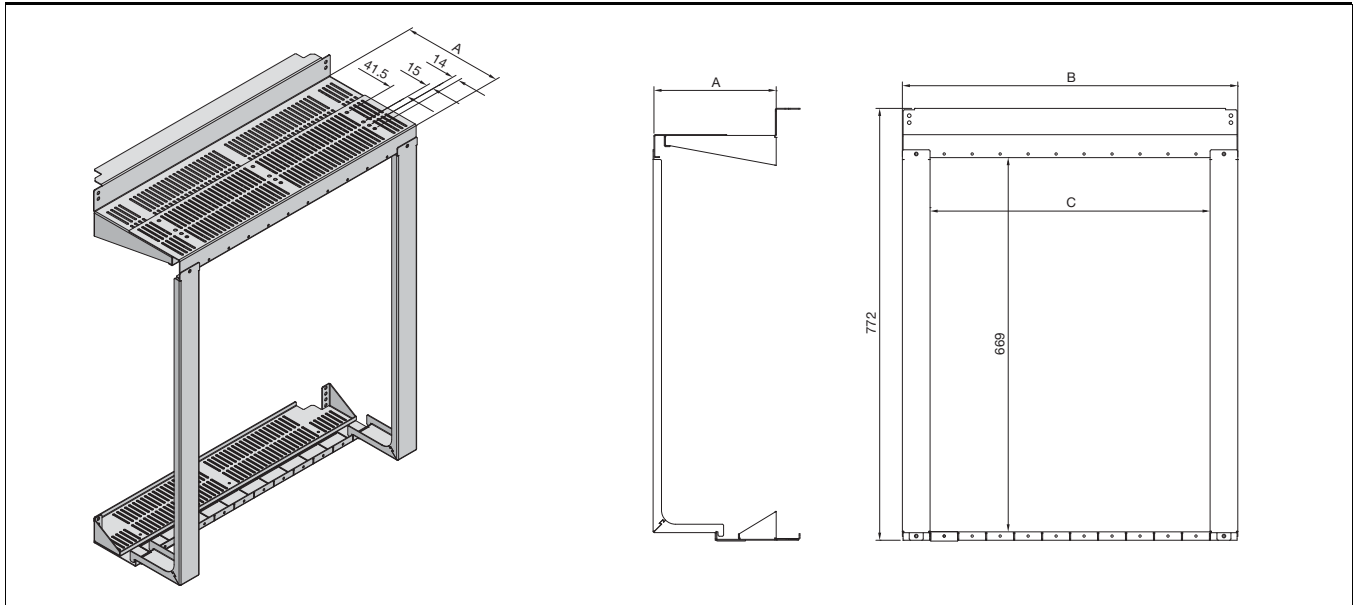

| Model No. SV | | 9674.960 | | | 9674.980 | | | 9674.900 | | | 9674.920 | | |
|------------------------|----------------------|----------|-----|-----|----------|-----|-----|----------|-----|-----|----------|------|------|
| For enclosure width mm | | 600 | | | 800 | | | 1000 | | | 1200 | | |
| Dimensions mm | | A | B | C | A | B | C | A | B | C | A | B | C |
| Busbar system used | 185 mm (SV 3052.000) | 218.5 | 597 | 500 | 218.5 | 797 | 700 | 218.5 | 997 | 900 | 218.5 | 1197 | 1100 |
| | Flat-PLS 60 | 247.5 | 597 | 300 | 247.5 | 797 | 500 | 247.5 | 997 | 700 | 247.5 | 1197 | 900 |
| | Flat-PLS 100 | 288.5 | 597 | 300 | 288.5 | 797 | 500 | 288.5 | 997 | 700 | 288.5 | 1197 | 900 |
| | Maxi-PLS 1600/2000 | 218.5 | 597 | 500 | 218.5 | 797 | 700 | 218.5 | 997 | 900 | 218.5 | 1197 | 1100 |
| | Maxi-PLS 3200 | 232.5 | 597 | 500 | 232.5 | 797 | 700 | 232.5 | 997 | 900 | 232.5 | 1197 | 1100 |