


Cover plate, slotted

SV 9674.990

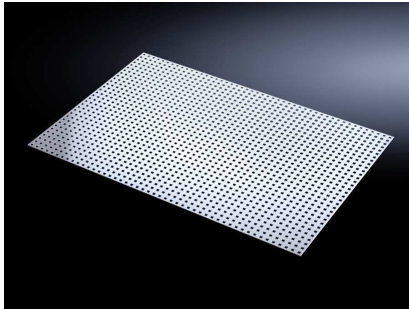

Description:

To cover live parts and comply with the internal protection category IP 2X and IP XXB within low-voltage switch- and control gear.

Integral vent holes allow convection inside a system.

Technical Data:

Material

- insulating material (hard PVC), transparent

Dimensions

- 1200 mm x 800 mm x 3 mm

Properties

- permanent temperature resistance up to +62°C
- fire behavior acc. UL 94-V0
- glow wire test acc. DIN EN 60695-2 at 850°C
- thermoplastic

Processing

- machinable (drilling, milling or sawing, with machines and tools for metalworking and woodworking)
- thermoformable (bending radius at least 6mm, remove existing protective film before)